


REINFORCED RESIN BOND Cut-off & Depressed centre




With multi-layered fiberglass reinforcement for safe operation, these wheels are used in a range of sizes to suit the various brands of electric and pneumatic portable angle grinders.

Regular shape of cut-off (1A) and depressed centre (1A - 27A):

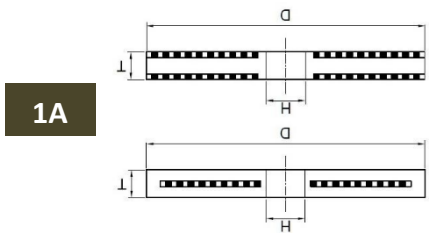

1A

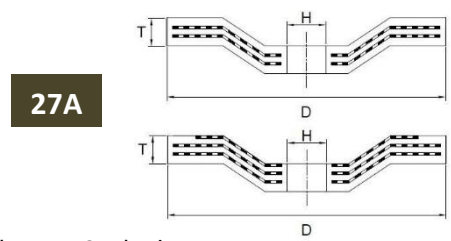

27A

Single and double glass fibers (F2) design.

Recommended wheel speed of cut-off and depressed centre :


Diameter	Thickness	Hole size	F1 max rpm	F2 max rpm
100 mm	1 - 6 mm	16 mm	13,700	15,300
125 mm	2 - 6 mm	22 mm	11,000	12,200
180 mm	2 - 3 mm	22 mm	7,600	8,500
305 mm	2 - 6 mm	25.4 mm	4,500	5,000
355 mm	2 - 3.2 mm	25.4 mm	3,900	4,300
405 mm	3 - 4 mm	25.4 mm	3,000	3,800

Standing Inventory List

Reinforced resin bond depressed centre (Unit : mm)

Item	Specification	Size	MOQ	Color
 Depressed centre	A24 BF 27A	100 X 6 X 16	100 pcs	■
	A24/WA24 BFR 27A	100 X 6 X 16	100 pcs	■
	A24 BF 27A	125 X 6 X 22	100 pcs	■
	A24/WA24 BFR 27A	125 X 6 X 22	100 pcs	■
	A24 BF 27A	150 X 6 X 22	50 pcs	■
	A24 BF 27A	180 X 6 X 22	50 pcs	■
	A24 BFR 27A	180 X 6 X 22	50 pcs	■
	WA24 BFR 27A	180 X 6 X 22	50 pcs	■

Reinforced resin bond cut-off (Unit : mm)

Item	Specification	Size	MOQ	Color
 Cut-off	AC46 BF 1A	100 X 1 X 16	640 pcs	■
	AC46 BF 1A	100 X 2 X 16	240 pcs	■
	AC46 BF2 1A	100 X 2 X 16	240 pcs	■
	A30 BFR2 1A	180 X 3 X 22	100 pcs	■
	A30 BF 1A	305 X 3.2 X 25.4	25 pcs	■
	A30 BSFR 1A	305 X 3.2 X 25.4	25 pcs	■
	A30 BF 1A	355 X 3.2 X 25.4	25 pcs	■
	A30 BSFR 1A	355 X 3.2 X 25.4	25 pcs	■
	A30 BF 1A	405 X 3.5 X 25.4	25 pcs	■
	A30 BSFR 1A	405 X 3.5 X 25.4	25 pcs	■

- F1 single glass fiber
- F2 double glass fibers




Feature of products

1. Special reinforced fiber in the wheel for high security and fast operation efficiency.
2. Special design for grinding casting, welding seam, soldering angle, pouring open, arc plane and etc.
3. Excellent sharpness, durability, application and a wide range of grinding and cutting applications.

Comparison table of abrasive and work-piece material :

Abrasive Material	A	64A	WA	SPA	AZ	A/C
Carbon Steel	●	●		●	●	
High Tensile Steel	●	●		●	●	
Stainless Steel	●		●		●	
Alloy Steel	●		●		●	
Cast Iron	●	●		●	●	
Aluminum	●					●
Bronze, Brass	●					●
Titanium	●			●		●



- Aluminum Oxide(A) is widely applied on various kinds of metal.
- Zirconia aluminum(AZ) is characterized by hard, dense structure, high toughness, good thermal-stability, and long life time.

COMPANY INFORMATION

Carbo Tzujan Industrial Co., Ltd.

For details, please contact the following agency.



Contact us:

- TEL : +8862-2679-3461 #132
- FAX : +8862-8677-1742
- Address : No1, Fu An St, Yingge Dist, New Taipei City, Taiwan

Online service :

- Website : www.carbo.com.tw
- E-mail : webmaster@carbo.com.tw

■ While using grinding wheels, its essential that observing correct procedures to protect yourself.